

IAP11 Rec'd PCT/PTO 19 JUL 2006

1

**MODULAR SWITCHING DEVICE****BACKGROUND OF THE INVENTION**

**[0001]** The invention relates to modular switching devices employed in electrical engineering.

**[0002]** Switching devices are instruments employed for opening and closing an electric circuit. The switching device comprises at least one pole and a control device adapted to open and close said pole. Switching devices include switches and switch-fuses, for example.

**[0003]** It is known to construct a switching device modular such that the switching device comprises a controller device module and pole cell modules. It is known to connect the control device module and the pole cell modules together with a main shaft such that the main shaft transfers the power required for opening and closing the poles of the switching device from the control device module to the pole cell modules.

**[0004]** The axial lengths of different switching device assemblies, i.e. the lengths in the direction of the main shaft, vary depending on the number of modules and the size of the individual modules. The thicknesses of the main shafts also vary in different assemblies. This is because the power required for opening and closing the poles is different in different switching device assemblies.

**[0005]** The problem in the above-described arrangement is that several types of main shafts have to be manufactured and stored for the different switching device assemblies.

**BRIEF DESCRIPTION OF THE INVENTION**

**[0006]** The object of the invention is to provide a switching device allowing the above-mentioned problems to be solved. The object of the invention is achieved with a switching device, which is characterized in what is stated in the independent claims. Preferred embodiments of the invention are described in the dependent claims.

**[0007]** The invention is based on each module of the switching device comprising a shaft element that is coupled directly to a shaft element of an adjacent module without a separate connecting element.

**[0008]** An advantage of the switching device of the invention is the facility of constructing and expanding different switching device assemblies.

## BRIEF DESCRIPTION OF THE FIGURES

**[0009]** In the following, the invention will be described in more detail in connection with preferred embodiments with reference to the accompanying drawings, in which

Figure 1 shows the control device module of a switching device according to an embodiment of the invention seen obliquely from above;

Figure 2 shows the control device module of Figure 1 seen obliquely from below;

Figure 3 shows a switching device assembly according to an embodiment of the invention; and

Figures 4a and 4b show cross-sections of the main shafts of some switching devices of the invention.

## DETAILED DESCRIPTION OF THE INVENTION

**[0010]** A switching device according to an embodiment of the invention comprises a control device module 2 and several pole cell modules according to Figure 1. The control device module 2 and the pole cell modules are interconnected with a main shaft, which is adapted to transfer the power required for opening and closing the poles of the switching device from the control device module 2 to each pole cell module.

**[0011]** The control device module 2 and each pole cell module of the switching device comprise a main shaft element 6. Each main shaft element 6 is adapted to be connected to the main shaft element 6 of an adjacent module. Consequently, the main shaft is composed of interconnected main shaft element 6, each of which is comprised by the corresponding module of the switching device.

**[0012]** Figures 1 and 2 show that a first end of the main shaft element 6 of the control device module 2 is provided with a male connecting member 8, and a second end is provided with a female connecting member 10. The type of the male connecting member 8 is a grooved shaft, a so-called spline shaft, and it comprises eight teeth 12 projecting in the radial direction, eight recesses 14 remaining between these teeth. The female connecting member 10 is an inner grooved shaft and it is adapted to receive the male connecting member 8 inside thereof.

**[0013]** Each module of a switching device according to an embodiment of the invention comprises a connecting member arrangement similar to

that of the control device module 2 of Figure 1, i.e. a first end of the shaft element is provided with a male connecting member 8, a second end being provided with a female connecting member 10.

**[0014]** The control device module 2 of Figure 1 can be connected to an adjacent module, such as a pole cell module by means of either its male connecting member 8 or its female connecting member 10. It is also possible to achieve a switching device assembly wherein two other modules are connected to the control device module 2, the first of said modules being connected to the male connecting member 8 and the second of said modules being connected to the female connecting member 10. An example of such a switching device assembly is shown in Figure 3.

**[0015]** The main shaft elements 6 and the other shaft elements, adapted to be connected to the main shaft elements, are preferably designed such that they are able to connect directly to each other and to transfer the required torque without separate connecting elements.

**[0016]** A switching device product series may comprise several switching devices having different frame sizes. Herein, frame size refers primarily to the physical dimensions of the switching device, although a given correlation exists between the physical dimensions and the nominal current values of the switching device. In other words, switching devices having high nominal currents are typically larger than switching devices having low nominal currents.

**[0017]** The powers required for opening and closing the poles of switching devices of different sizes may deviate considerably from each other. For this reason it is often justifiable to employ main shafts of different strengths in switching devices having different frame sizes.

**[0018]** A switching device may comprise not only a control device module and pole cell modules, but also one or more additional modules. Such an additional module may be an auxiliary contact module, for example. An auxiliary contact module comprises auxiliary contacts for locking, alarm, position indication and auxiliary circuits, for example.

**[0019]** Figure 3 shows a switching device assembly according to an embodiment of the invention comprising a control device module 2, six pole cell modules 3, and three additional modules 5. The modules connected to the control device module 2 are positioned such that part of the modules are located in a first axial direction relative to the control device module 2, the rest

being located in a second axial direction relative to the control device module 2. Herein, axial direction refers to the direction of the main shaft of the switching device, i.e. a horizontal direction in the case of Figure 3.

**[0020]** In the assembly of Figure 3, the pole cell modules 3 are connected to the control device module 2 such that three pole cell modules 3 are located on the left side of the control device module 2, the remaining three pole cell modules 3 being located on the right side of the control device module 2. The additional modules 5 are positioned such that two additional modules are connected to the left end of the switching device assembly, and the third additional module is connected to the right end of the switching device assembly. The driving shaft element of the additional module located at the right end of the assembly as well as the driving shaft element of the additional module located second from the left are connected to the main shaft element of the adjacent pole cell module 3, and the driving shaft element of the additional module 5 located at the left edge of the assembly is connected to the driving shaft element of the adjacent additional module.

**[0021]** The additional modules 5 usually comprise components whose operation requires a substantially smaller torque than is required for operating the contacts of the pole cell modules 3. In addition, the frame size of the control device module 2 and the pole cell modules 3 of the switching device assembly has practically no effect on the operating torque required by the additional modules 5 of the assembly, i.e. the same components are usually employed in the additional modules 5 irrespective of the frame size of the control device module 2 and the pole cell modules 3.

**[0022]** The driving shaft elements of the additional modules 5 of a particular switching device product series can be dimensioned for a higher or lower torque than or a torque equal to the main shaft element 6 of the pole cell module 3 of the smallest frame size in the product series, according to the need. In a preferred embodiment, the driving shaft elements of all additional modules in the same product series are dimensioned for an equally high torque.

**[0023]** A switching device product series according to an embodiment of the invention comprises pole cell modules and control device modules having different frame sizes, but only one type of additional modules. Such a product series may be composed for instance of four pole cell modules having different frame sizes, four control device modules having different frame sizes,

and a plurality of different types of additional modules, which all have the same frame size, and which are adapted to be directly connected to any module of the same product series without adjusting parts.

**[0024]** The product series according to a second embodiment comprises pole cell modules and control device modules having different frame sizes, and different additional modules, which have different frame sizes but are adapted to be directly connected to any module of the same product series without adjusting parts.

**[0025]** An additional module 5 whose driving shaft element is dimensioned for substantially the same torque as the main shaft elements of the control device module 2 and the pole cell modules 3 of the switching device assembly, can in principle be connected to any axial point of the assembly. Consequently, it is possible to place such an additional module 5 between the control device module 2 and a pole cell module 3, or between two pole cell modules. By contrast, an additional module 5 whose driving shaft element is dimensioned for a substantially lower torque than are the main shaft elements 6 of the control device module 2 and the pole cell modules 3 of the switching device assembly has naturally to be positioned such that operating torque is not transferred through it from the control device module 2 to any pole cell module 3.

**[0026]** Figure 4a shows a male connecting member 8 of the main shaft element 6 of a module having a first frame size in a switching device product series, seen from the axial direction, and Figure 4b shows a male connecting member 8 of the main shaft element 6 of a module having a second frame size in the same product series. The main shaft element 6 of Figure 4a belongs to a module whose frame size is smaller than the frame size of the module to which the main shaft element 6 of Figure 4b belongs. This is why the diameter  $d_1$  of the main shaft element 6 of Figure 4a is smaller than the diameter  $d_2$  of the main shaft element 6 of Figure 4b.

**[0027]** The product series to whose modules the main shaft elements 6 of Figures 4a and 4b belong is adapted such that a similar additional module 5 can be connected to a control device module 2 or pole cell module 3 having any frame size. This feature is achieved with universal teeth 16. The male connecting members 8 of the main shaft elements 6 of all control device modules 2 and all pole cell modules 3 of the product series comprise a pair of universal teeth 16, which is substantially similar irrespective of the frame size.

The female connecting members of the driving shaft elements of the additional modules 5 of the product series are adapted to connect to these universal teeth 16. Correspondingly, the female connecting members 10 of the main shaft elements 6 of all control device modules 2 and pole cell modules 3 of the product series comprise a pair of grooves, which is substantially similar irrespective of the frame size, and which is adapted to receive a pair of universal teeth 16. The male connecting members of the driving shaft elements of the additional modules 5 of the product series are adapted to connect to said pair of grooves adapted to receive the universal teeth.

**[0028]** The connecting member 8 of both Figure 4a and Figure 4b comprises eight teeth projecting in the radial direction and eight recesses remaining between these teeth. In both connecting members 8, the universal teeth 16 are placed at 180° from each other, i.e. they are located on opposite sides of the shaft.

**[0029]** In the connecting member 8 of Figure 4a, teeth 18, which are not universal teeth 16, are equally long as but narrower than the universal teeth. Both the distance between the tips of the opposite universal teeth 16 and the distance between the tips of the other opposite teeth 18 are substantially the same as the diameter  $d_1$  of the main shaft element 6. In the connecting member 8 of Figure 4b, teeth 20, which are not universal teeth 16, are as broad as but longer than the universal teeth. The distance between the tips of the teeth 20, which are not universal teeth, is substantially the same as the diameter  $d_2$  of the main shaft element 6.

**[0030]** The module of the switching device of the invention may comprise one or more universal teeth 16. The shape of the universal teeth 16 is not limited to the shapes shown in Figures 4a and 4b. If desired, the universal teeth 16 may be designed different from the other teeth of the main shaft element 6. Accordingly, the universal teeth 16 may be designed to have a substantially triangular cross-section, for example, even if the other teeth had a substantially rectangular cross-section, as in Figures 4a and 4b.

**[0031]** The one or more universal teeth 16 provided in the main shaft element 6 may be employed to facilitate the fitting of the modules of the switching device to each other, since said one or more universal teeth can be used to delimit the positions allowing the male connecting member 8 of a first module to be inserted into the female connecting member 10 of a second module. This allows for instance the correct position of the main shaft element

6 of the control device module 2 relative to the main shaft elements 6 of the pole cell modules 3 to be ascertained, whereby the zero position of the control device 2 corresponds to the open-position of the contacts of the pole cell modules 3, etc.

**[0032]** Both the main shaft elements 6 and the driving shaft elements are preferably designed such that they can be relatively easily fastened to each other and detached from each other several times. This results in the switching device assemblies being easily expandable and modifiable. For example, a new additional module could easily be added to the assembly of Figure 3 between the additional module 5 farthest to the right and the pole cell module 3.

**[0033]** In an embodiment, the modules of the switching device according to the invention are fastened to each other with screws that extend in the axial direction. In a preferred embodiment, the switching device assembly comprises at least one axially extending screw for each module such that said at least one screw is substantially of the length of said module and that its first end, which is designed to enable the driving of said screw with a tool, is provided also with a thread, into which a thread at the other end of a second screw can be driven. It is obvious to a person skilled in the art that the basic idea of the invention can be implemented in a variety of ways. Consequently, the invention and its embodiments are not restricted to the above examples, but may vary within the scope of the claims.

## CLAIMS

1. A modular switching device comprising a plurality of interconnected modules (2, 3), said modules comprising a control device module (2) and a pole cell module (3), said modules (2, 3) of the switching device being interconnected with a shaft adapted to transfer a torque required for operating the switching device from one module (2) to another module (3), **characterized** in that each module (2, 3) comprises a shaft element (6), and in that said shaft transferring the torque is composed of directly interconnected shaft elements (6).

2. A modular switching device as claimed in claim 1, **characterized** in that both ends of the shaft element (6) of each module (2, 3) in the switching device is provided with a connecting member (8, 10) for connecting to a shaft element of an adjacent module.

3. A modular switching device as claimed in claim 2, **characterized** in that the connecting member provided at a first end of the shaft element (6) of each module (2, 3) is a male connecting member (8), and the connecting member provided at a second end is a female connecting member (10).

4. A modular switching device as claimed in claim 2 or 3, **characterized** in that the connecting members (8, 10) of the shaft element (6) of at least one module (2) are of a grooved shaft type.

5. A modular switching device as claimed in any one of the preceding claims, **characterized** in that it comprises two modules (2, 5) that have frames of different sizes and are directly interconnected via said shaft elements.

6. A modular switching device as claimed in claim 5, **characterized** in that one of said two directly interconnected modules (2, 5) having frames of different sizes is an additional module (5), such as an auxiliary contact module.

7. A modular switching device as claimed in any one of the preceding claims, **characterized** in that the shaft element of each module (2, 3, 5) of the switching device comprises means for connecting to a shaft element of an additional module (5).

8. A modular switching device as claimed in claim 7, **characterized** in that said means for connecting to the shaft element of the addi-



tional module (5) comprise at least one general tooth (16).

9. A switch device module, **characterized** in that it is adapted for use in a modular switching device as claimed in claim 1.

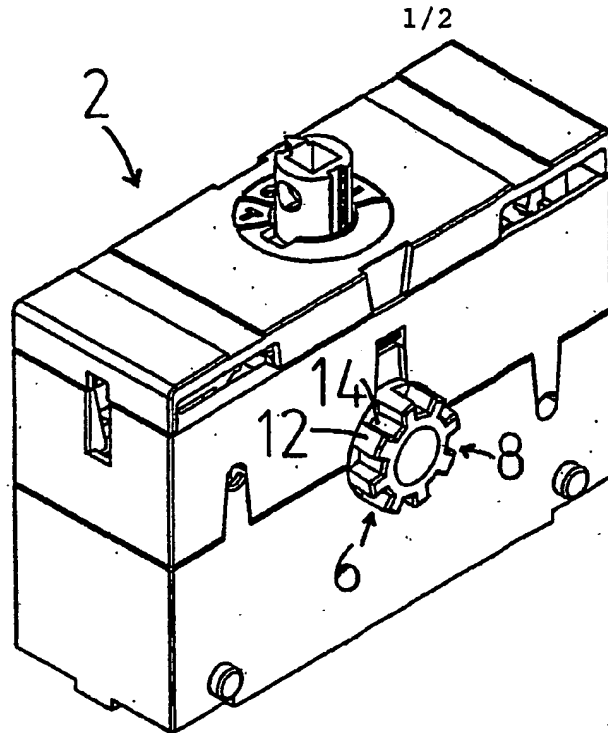


FIG 1

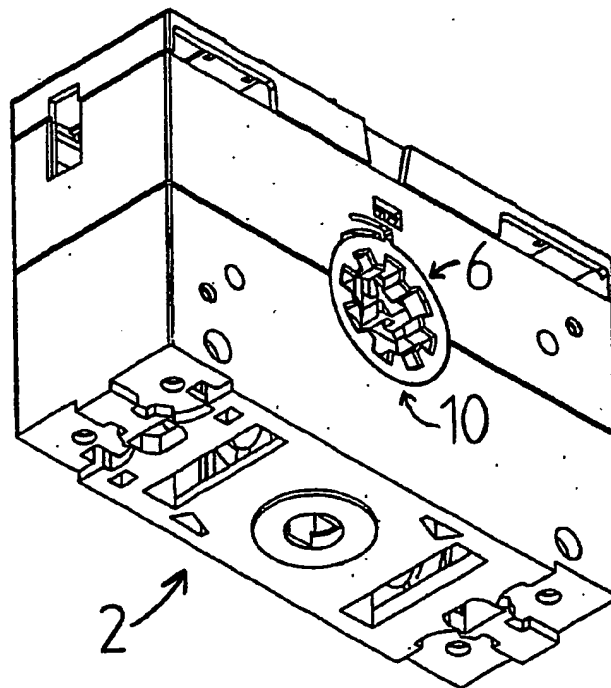


FIG 2

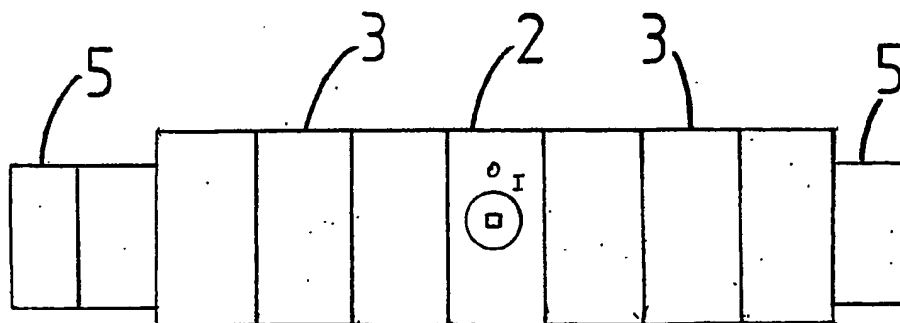


FIG 3

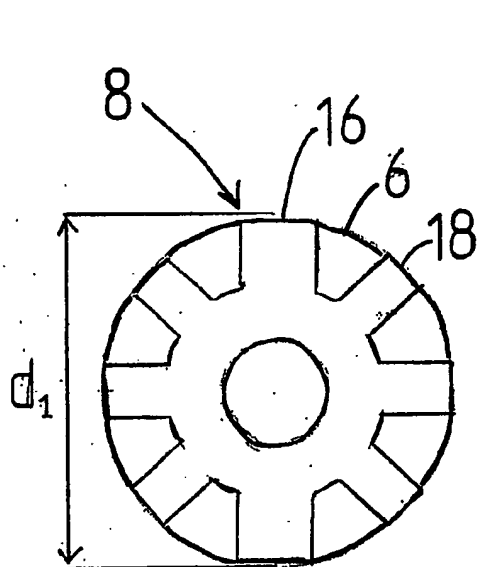


FIG 4a

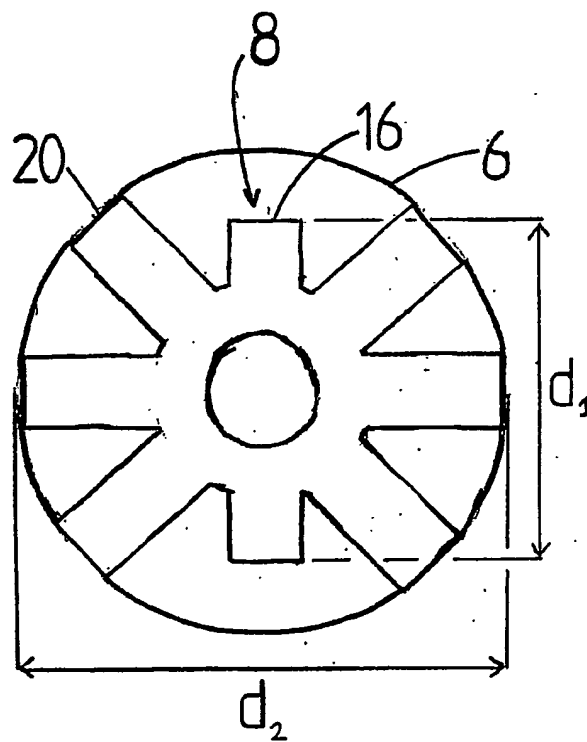


FIG 4b

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 2005/000032

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H01H 9/00, H01H 19/60

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H01H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6259338 B1 (F. BOEDER ET AL), 10 July 2001 (10.07.2001), column 1, line 15 - column 4, line 12 --	1-9
X	WO 03050830 A1 (ABB SERVICE SRL), 19 June 2003 (19.06.2003), page 1, line 10 - page 8, line 18 --	1-9
A	US 5777283 A (D. GREER), 7 July 1998 (07.07.1998), column 2, line 21 - column 4, line 67 --	1-9
A	WO 03009324 A1 (MOELLER GMBH), 30 January 2003 (30.01.2003), page 1, line 16 - page 3, line 2 -- -----	1-9

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

18 May 2005

Date of mailing of the international search report

23-05-2005

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Antonio Farieta / MRo  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

Information on patent family members

01/04/2005

International application No.

PCT/FI 2005/000032

US	6259338	B1	10/07/2001	DE	19910032 C	06/04/2000
				EP	1037239 A,B	20/09/2000
WO	03050830	A1	19/06/2003	AU	2002361393 A	00/00/0000
				EP	1454331 A	08/09/2004
				IT	MI20012587 A	10/06/2003
				US	20040256207 A	23/12/2004
US	5777283	A	07/07/1998	US	5609245 A	11/03/1997
				US	5737195 A	07/04/1998
				US	5739488 A	14/04/1998
				US	5746306 A	05/05/1998
WO	03009324	A1	30/01/2003	DE	20111726 U	05/12/2002
				EP	1407466 A	14/04/2004

BEST AVAILABLE COPY